



VAL2014

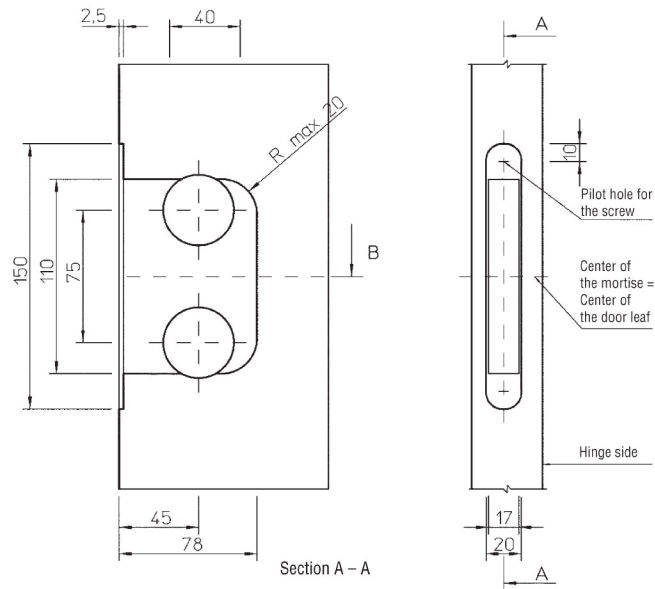

Section A - A




Door without seals $a = 20$ / Door with seals $a = 22$


Section B - B

When 7640 cover plate is used with locks 2024 and 2025 it is recommended to make the mortise for the forend 3 mm deep.

VAL2018

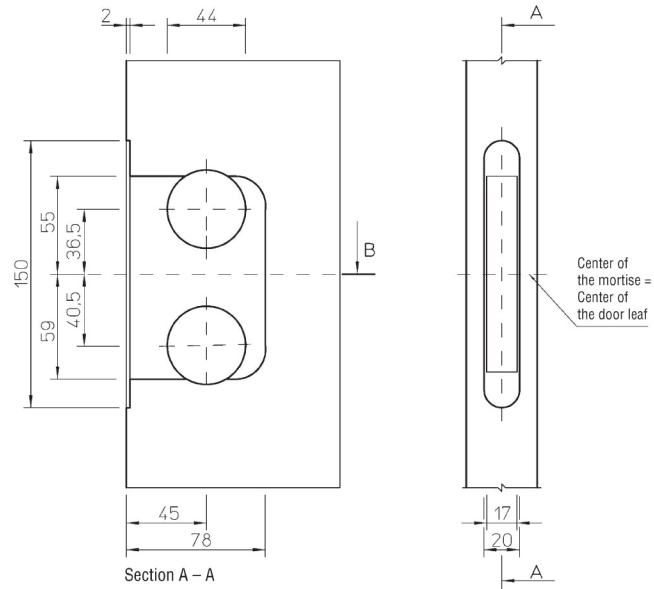

Section A - A



Section B - B

valnes[®]

Turvalisem elu